

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/255764989>

A microfluidic technique for generating monodisperse submicron-sized drops

Article in RSC Advances · January 2013

DOI: 10.1039/C2RA23090A

CITATIONS

9

READS

131

6 authors, including:



Yann Yip Cheung Sang

Paris Diderot University

14 PUBLICATIONS 238 CITATIONS

[SEE PROFILE](#)



Elise Lorenceau

French National Centre for Scientific Research

65 PUBLICATIONS 2,838 CITATIONS

[SEE PROFILE](#)



Sebastian Wahl

Ecole Supérieure d'Ingénieur en Electronique et Electrotechnique - Paris

5 PUBLICATIONS 45 CITATIONS

[SEE PROFILE](#)



Reinhard Hohler

Sorbonne Université

62 PUBLICATIONS 1,842 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



Particles at interfaces [View project](#)



Flow in aqueous foams [View project](#)

A microfluidic technique for generating monodisperse submicron-sized drops

Cite this: *RSC Advances*, 2013, 3, 2330

Yann Yip Cheung Sang,^{ab} Elise Lorenceau,^c Sebastian Wahl,^d Maximilien Stoffel,^d Dan E. Angelescu^d and Reinhard Höhler^{*be}

Received 11th September 2012,
Accepted 3rd December 2012

DOI: 10.1039/c2ra23090a

www.rsc.org/advances

We present a route for producing monodisperse micro and nanodrops that is based on a liquid–gas phase transition occurring within a microfluidic device. A gas which is soluble in water is mixed with an insoluble one and injected into an aqueous surfactant solution, using a microfluidic device that produces monodisperse bubbles. As the soluble gas diffuses out of the bubbles, they shrink and the remaining insoluble gas condenses into drops. Their radius can be tuned over a wide range by changing the initial gas mixing ratio.

1. Introduction

Drops with sizes of the order of 100 nm are used as templates for photonic crystals,¹ in bio-medical applications such as drug delivery² and for imaging.³ Such drops can carry substances or nanoparticles and their interfaces can be functionalized to bind to specific biological targets. Perfluorocarbon liquids drops are of particular interest for medical applications, because of their biocompatibility.^{2b,3} In many cases, accurate control of the size is crucial: It must be small enough for the drops to pass through biological membranes and to avoid destruction by macrophages. In templates for photonic crystals, the lattice constant of the droplet packing must be matched to the light wavelength. Monodisperse nanodrops can be obtained by fractionation and shear rupture techniques, but they require extremely high shear rates and their efficiency depends on the phase diagram of the surfactants chosen to stabilize the emulsion.⁴ As an alternative to emulsification based on shear-induced rupture, various microfluidic devices producing monodisperse drops and bubbles have been developed in recent years.⁵ However, the smallest droplet sizes obtained by such devices are generally of the order of a micrometer.⁶ Recently, submicron droplet production using a microfluidic device

operating in a tip-streaming mode was reported, at a rate of several hundreds of droplets per second.⁷

In this paper, we present a proof-of-concept experiment that validates a new approach for making monodisperse microdrops, and we show that it offers the perspective of making nanodrops at a high rate. We first prepare an aqueous surfactant solution and a mixture of two gases: one is highly soluble in water (carbon dioxide), the other is an almost insoluble perfluorocarbon vapor (perfluorohexane). Liquid and gas are injected into a microfluidic device that produces monodisperse microbubbles. The soluble component of their gas content diffuses into the neighboring liquid whereas the perfluorocarbon vapor remains trapped. As the bubbles shrink, the vapor is increasingly compressed. This effect is enhanced by the Laplace pressure, which scales as the inverse of bubble radius. When the perfluorocarbon gas pressure in the bubbles reaches the equilibrium vapor pressure, condensation sets in, the bubbles collapse, and micro- or nanodroplets are formed. The size-reduction ratio relating the initial bubble and the final droplet depends on the composition of the initial gas mixture and can therefore be tuned freely over a wide range, for a fixed device geometry, pressure and temperature. Controlled shrinkage of bubbles in a microfluidic device, due to diffusive gas transfer to the surrounding liquid, has been reported previously as a method for making monodisperse microbubbles. In this latter work,⁸ the extent of dissolution of bubbles in the device was controlled by the saturation of the continuous aqueous phase with gas. By analogy, one might attempt to reduce the size of drops by letting their content diffuse into the surrounding phase. In the case of perfluorocarbon drops dispersed in water, this approach is hopeless since this material is almost totally insoluble in water. Therefore, our method based on a phase transition transforming bubbles into droplets is a major extension of previous techniques.

^aUniversité Paris Diderot, Laboratoire Matière et Systèmes Complexes, UMR 7057 CNRS 10 rue, Alice Domon et Léonie Duquet, 75205, Paris Cedex 13, France

^bUniversité Paris-Est, Laboratoire Physique des Matériaux Divisés et des Interfaces, EA 7264, 5 Bd, Descartes, 77454, Marne-la-Vallée, France

^cUniversité Paris-Est, Laboratoire Navier, UMR 8205 CNRS, 2 Allée Kepler, 77420, Champs sur, Marne, France

^dUniversité Paris-Est, Laboratoire ESYCOM-ESIEE, 2 Bd Blaise Pascal, 93162, Noisy le Grand, France

^eUniversité Paris 6, INSP, UMR 7588 CNRS-UPMC, 4 place Jussieu, 75252, Paris Cedex 05, France. E-mail: hohler@insp.upmc.fr

2. Theoretical background

Bubble shrinkage due to gas diffusion has been modeled in the literature,⁹ but in the case where the gas contained in the bubble is a mixture of a soluble and an insoluble component one has to consider an additional effect, the osmotic pressure opposed to the transfer of the soluble gas species out of the bubble. This contribution was not taken into account in previous theoretical analyses.⁹ On the basis of a closely analogous calculation for emulsion droplets containing an insoluble species,¹⁰ we derive the following time evolution of the bubble radius R from the equality of chemical potentials for the soluble gas inside and outside the bubble, the Laplace equation and the diffusion equation:

$$\frac{dR}{dt} = \frac{D k_B T c_0}{R P_0 (P_0 + 4\sigma/3R)} \left(\varepsilon P_0 + \frac{3\eta k_B T}{4\pi R^3} - \frac{2\sigma}{R} \right) \quad (1)$$

σ is the tension of the bubble interface, P_0 the ambient pressure in the liquid, T the temperature, η the number of insoluble molecules contained in the bubble, D the diffusion constant for these molecules in the liquid and ε , the degree of saturation of the liquid with the soluble gas, defined as

$$\varepsilon = \frac{\bar{c} - c_0}{c_0} \quad (2)$$

$\bar{c}$ denotes the average concentration of the soluble species in the liquid and c_0 the solubility (the largest possible concentration) of this species. ε ranges from -1 (no dissolved gas) to 0 (maximum gas concentration). The three terms on the right hand side of eqn (1) represent respectively the effects of 1) the liquid pressure P_0 pushing on the bubble, modulated by the saturation parameter ε to take into account the dissolved gas, 2) the osmotic pressure, proportional to η , that tends to dilute the insoluble species and to keep therefore the soluble gas in the bubble and 3) the Laplace pressure, due to surface tension, that tends to squeeze the gas out of the bubble to minimize interfacial energy. Eqn (1) shows that in the presence of an insoluble species, bubble shrinkage is slowed down and it can stop at an equilibrium size, determined by solving this equation with $dR/dt = 0$. The dependency of this equilibrium bubble radius on η and ε is illustrated in Fig. 1. By comparing the partial pressures of the insoluble species in the bubble (considered as an ideal gas) to the vapor pressure of this species one can predict whether shrinking bubbles will first reach an equilibrium state or collapse into droplets. The vapor pressure of C_6F_{14} , the insoluble species used in our experiments, is 0.31 bar at 25°C .^{9a} Fig. 1 shows that in this case, collapse is ensured if the liquid is weakly saturated by the soluble gas (ε close to -1), a condition also required for fast shrinkage (*cf.* eqn (1)). However, for ε approaching zero, collapse can be inhibited. Fig. 1 indicates that if C_6F_{14} gas is used, this situation can only occur for $\eta > 10^8$ and that therefore, the effect cannot prevent the production of submicron droplets. Perfluorocarbon gases with fewer carbon atoms per molecule have much larger vapor pressures^{9a} (28 bar at 25°C for C_2F_6), and in this case, the model predicts that

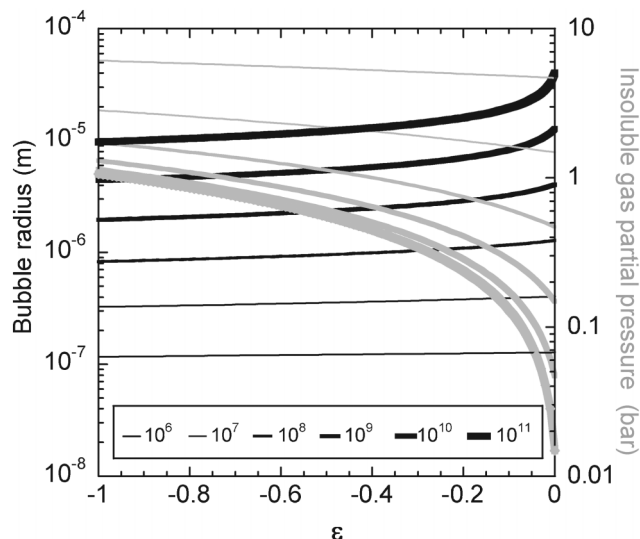


Fig. 1 The equilibrium bubble radius predicted by eqn (1) (black lines) and the partial pressure of the insoluble species (grey lines), considered as an ideal gas, are both plotted versus the degree of saturation ε of the liquid with the soluble gas, defined in eqn (2). Increasing line thicknesses distinguish the number of insoluble gas molecules per bubble, as specified in the insert. The calculations are performed for a temperature of 298 K and an interfacial tension of 37.5 mN m^{-1} .

bubble shrinkage stops before condensation sets in, in agreement with experiments.¹¹ We note that over long times, such bubble dispersions coarsen, due to the solubility of C_2F_6 in water which is much larger than that of C_6F_{14} .

3. Experiments

Fig. 2 illustrates our experimental setup. To prepare the gas mixture, we first evacuate a reservoir (volume: 1.2 l) with a vacuum pump. Then, we use a microsyringe to inject a controlled amount of liquid C_6F_{14} into the reservoir *via* a septum. This perfluorocarbon liquid has a vapor pressure of 0.31 bar at 25°C ^{9a} and it evaporates rapidly upon injection. We add CO_2 gas until a total pressure of 2 bar is reached. This gas mixture is homogenized using a fan located inside the reservoir. The aqueous solution used in our experiment is a 50% by weight mixture of glycerol and purified water (Millipore) to which $9.4 \times 10^{-3}\text{ g g}^{-1}$ of the surfactant tetradecyltrimethylammonium bromide (Aldrich) and $6.24 \times 10^{-6}\text{ g g}^{-1}$ of dodecanol (Aldrich) are added, and which is filtered and carefully degassed in a vacuum chamber prior to use. Due to the low concentration of CO_2 in air, degassing is not obviously a critical issue. However, if nitrogen were dissolved in the liquid, it would be absorbed by the bubbles which initially contain only CO_2 , due to an osmotic pressure effect similar to the one discussed above. As a consequence, bubble shrinkage can be slowed down or even stopped. The interfacial tension of our foaming solution was measured using the pendant drop method and found to be 37.5 mN m^{-1} , at a temperature of 22°C .

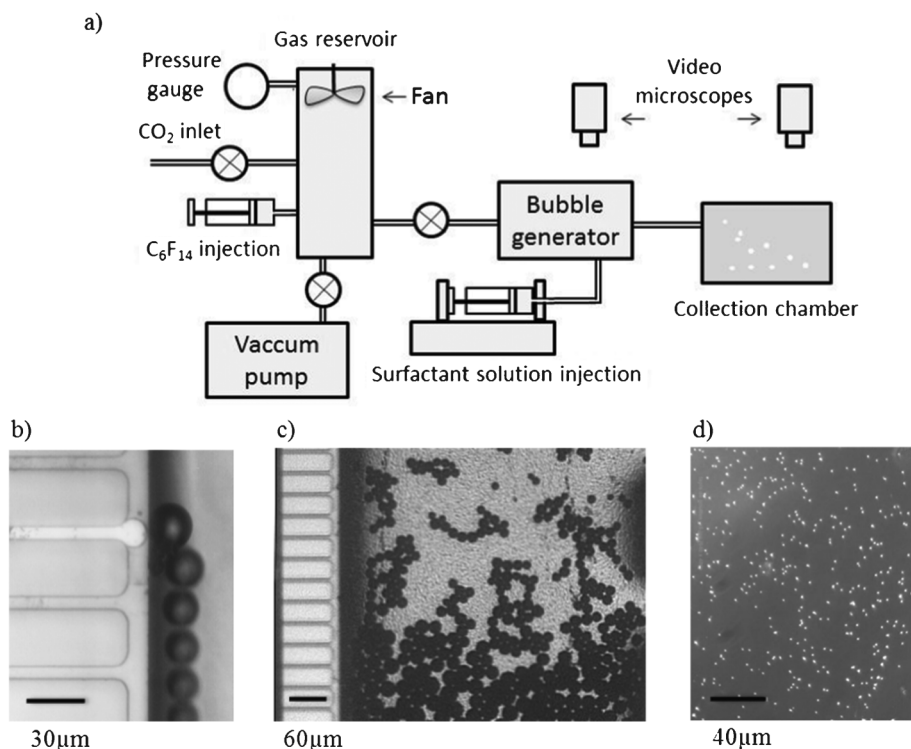


Fig. 2 (a) Schematic view of the experimental setup. (b) Bubble production in a single channel of the micro-fabricated bubble generator. The horizontal channel that looks white is filled with gas and produces bubbles, due to an instability driven by capillary forces. The other horizontal channels are not active in this experiment. (c) Bubble production and onset of shrinkage in the generator. (d) Perfluorocarbon droplets observed in the collection chamber.

The solution and the gas mixture are injected into a microfluidic bubble generator. In a first set of experiments, we used a generator that we have described previously¹² and which produces monodisperse bubbles with a radius of 45 μm . They were injected into a transparent collection cell previously filled by the solution described above. The cell was constantly stirred to prevent bubbles from accumulating at the top. In regions where bubbles accumulate, the saturation parameter ε would locally reach values approaching zero. Eqn (1) and Fig. 1 show that under these conditions, bubble shrinkage stops. The experimentally observed transformation from bubbles to drops typically took 3 min. To reduce this time, a smaller initial bubble size is required. In a second set of experiments we used a microfabricated foam generator that we recently described in full detail¹³ and that is similar to a microchannel emulsification device.¹⁴ In this second case, the bubbles had an initial radius close to 10 μm , with a standard deviation on the order of 1%, and we were able to implement bubble collapse and drop production as a steady process: The bubble suspension was continuously produced and transferred into a collection chamber, *via* a capillary whose length is 20 cm. At the end of this transit which lasts approximately 30 s for a typical liquid flow rate of 3 mL h^{-1} , all the bubbles were found to be already transformed into drops. Two video microscopes were used to observe the bubbles in the microfluidic device and the drops arriving in the collection cell.

4. Results and discussion

Fig. 3 shows a typical time evolution of the bubble radius, observed in the first device described above: bubbles shrink and finally collapse, giving rise to droplets which remain stable for thousands of seconds. Fig. 4 illustrates the final stages of the transformation from bubbles to drops, observed in the second device described above, using the microfabricated foam generator. The coefficient of variation that we find for the drops obtained here (radius: 0.7 μm) is close to 8%. The increase compared to the 1% coefficient of variation observed for the initially produced bubbles (radius: 10 μm) can to a large extent be attributed to the experimental resolution of our video microscope.

The size of the obtained droplets does not evolve on our experimental time scale. This is in agreement with previous studies of polydisperse aqueous perfluorocarbon emulsions with droplet sizes similar to ours where Ostwald ripening was found to increase the average droplet size only after many days.¹⁵ Drops can be distinguished from bubbles, because the refractive index of the surfactant solution is much closer to that of liquid C_6F_{14} than to that of air. Therefore, bubbles strongly scatter light and appear as black disks in Fig. 4, whereas droplets scatter light only weakly and their color on the picture appears lighter. Moreover, the bubbles and droplets shown in Fig. 4 are associated in clusters. We have observed that this effect can be strongly reduced by decreasing

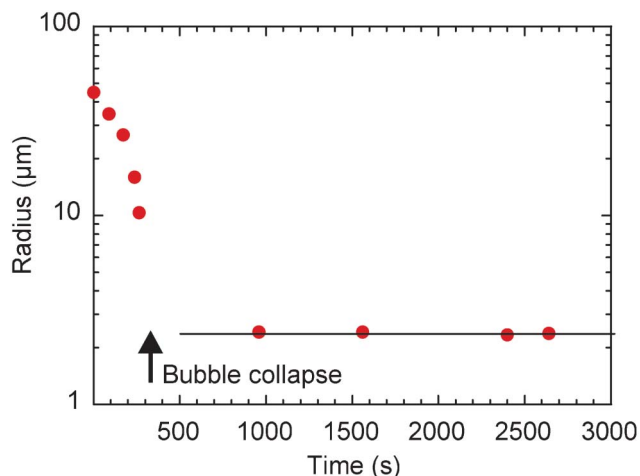


Fig. 3 Typical time evolution of bubble and droplet sizes, observed in the collection chamber of the first experimental configuration described in the text. The bubbles shrink and finally collapse into droplets of constant size. The final stages of the collapse are very fast and could not be resolved in our work using the first experimental configuration. This feature was observed using the second setup described in the text, as illustrated in Fig. 4.

the surfactant concentration, suggesting that the droplet flocculation is due to attractive depletion interactions induced by micelles.¹⁶

Fig. 5 shows the drop radii R obtained in our experiments as a function of η , the number of insoluble gas molecules per bubble. η is deduced from the known gas composition and the initial bubble size observed in the microfluidic device. For a given molecular volume v_m , one expects the relation $\eta v_m = 4\pi R^3/3$. The resulting power law $R \propto \eta^{1/3}$ is indeed in good agreement with our data over three orders of magnitude of η . The fitted prefactor 0.45 nm is within 5% of the one expected in view of the molecular volume $v_m = 3.3 \times 10^{-28} \text{ m}^3$ that can be estimated from the density and molecular weight of C_6F_{14} .¹⁵ These results demonstrate that our new technique, combining conventional microfluidics and physicochemical effects, can indeed be used to produce monodisperse

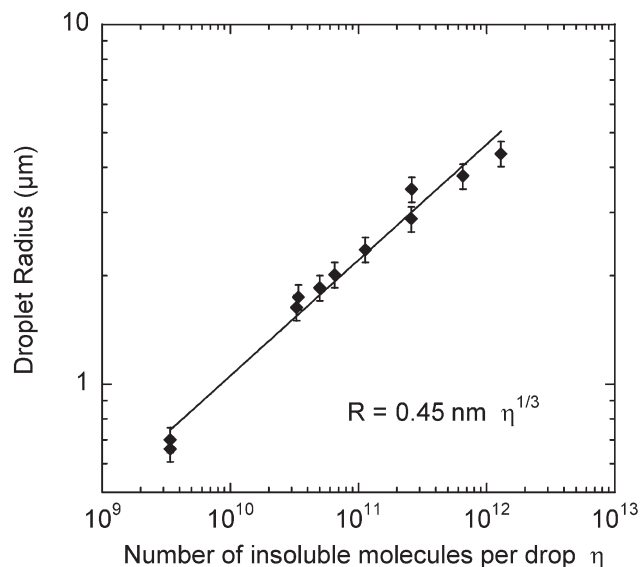


Fig. 5 Final drop radius R obtained after bubble collapse versus the number of water-insoluble molecules η initially contained in the bubbles and finally in the drops. The straight line is a power-law fit to the data, as indicated. The drops with a radius below 1 μm were obtained either using the microfabricated bubble generator (initial bubble radius 10 μm) and the other ones with the flow focusing device (initial bubble radius 45 μm), as described in the text. The indicated error bars indicated the typical coefficient of variation.

microdroplets, and that their size can be freely tuned *via* the concentration of insoluble vapor in the gas, injected into the microfluidic device.

The results shown on Fig. 5 raise the question whether there are any fundamental limits to a reduction of the droplet size. Reducing the C_6F_{14} concentration in the gas by an order of magnitude or more is straightforward, using the setup shown on Fig. 2: to dilute a given gas mixture, we reduce its pressure to a small value using the vacuum pump, and we then add CO_2 gas to re-establish the original pressure, required to operate the microfluidic device. We have used this approach to make droplets which contained 4.3×10^8 molecules of C_6F_{14} , and whose radius can be estimated by extrapolating the data on Fig. 4 as 340 nm. We did observe these droplets, but the resolution of our microscope did not allow us to measure their size accurately. The lower limit of stable droplet sizes that can be obtained may be set by the solubility of the perfluorocarbon liquid in water which is very low¹⁵ ($2.7 \times 10^{-7} \text{ mol L}^{-1}$), but not zero. However, experiments show that perfluorocarbon (perfluorotributylamine) emulsions with droplet diameters of 200 nm can be stable over at least two weeks, so that at least down to this size range, solubility is not a critical issue.¹⁷ Another important feature is the rate of droplet production. It is only of the order of 10^2 Hz in our proof of principle experiment, but it can be enhanced by using generators described in the recent literature^{6a} that produce monodisperse bubbles of a radius below 5 μm , at a rate up to 10^6 Hz . Droplet production at such a rate would be of interest for many biomedical applications. This perspective is an advantage

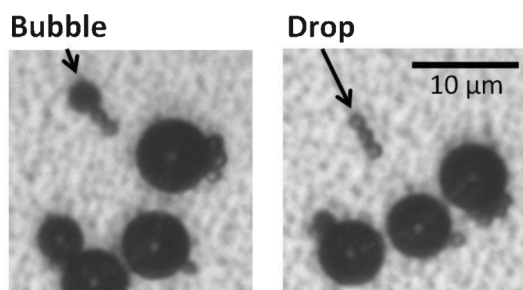


Fig. 4 Two images, taken near the output of the microfabricated foam generator, at a time interval of 5 s illustrate the transformation from bubbles to drops. To avoid convective displacements that carry the bubbles out of the field of view, the gas and liquid injection were stopped just before the observation. Bubbles appear as black disks, whereas drops have a lighter color, as explained in the text.

compared to microfluidic submicron droplet production using a specific tip streaming operating mode⁷ where the production rate is of the order of 10^2 Hz.

We finally discuss in what respect the new monodisperse perfluorocarbon droplet production technique that we report will be useful in applications. A monodisperse size distribution greatly reduces the growth of the average droplet size due to Ostwald ripening, an aging process driven by differences in radius (and thus Laplace pressure) among the droplets. If coalescence is suppressed by a suitable choice of surfactants, making highly monodisperse nanoemulsions can thus be an alternative to other more complex stabilization strategies, such as encapsulation. Enhanced stability and size control are useful in biomedical applications, such as enhanced oxygen transfer¹⁷ which relies on the very large solubility of oxygen in perfluorocarbon liquids.¹⁷ Applications where droplets must travel through biological membranes are another case where accurate size control is crucial. An example is MRI imaging, where the large NMR activity of the ¹⁹F atoms contained in perfluorocarbon molecules is used¹⁸ and where the droplet interfaces are functionalized by adsorbed lipid layers and targeting ligands. This functionalization has been demonstrated with perfluorocarbon droplets obtained using other techniques,¹⁸ and may therefore also be applied to nanoemulsions obtained using our setup. This approach where shrinking bubbles give rise to droplets may enhance the adsorption process: the initially large bubble surface area helps to adsorb efficiently substances dissolved in the surrounding bulk liquid to the interface, and upon bubble shrinkage, the surface concentration of these substances will increase strongly.

5. Conclusions

We have demonstrated experimentally a new approach for making monodisperse submicron droplets, based on a liquid-gas phase transition occurring within a microfluidic device. A theoretical analysis is provided that shows under which conditions such devices can be operated. Our approach opens the perspective of producing monodisperse nanoemulsions with a freely tunable droplet size, useful in a wide range of biomedical and photonic applications.

Acknowledgements

We acknowledge financial support by the Institut Carnot VITRES and we thank Jean-Marc Di Meglio for discussions.

References

- 1 V. N. Manoharan, A. Imhof, J. D. Thorne and D. J. Pine, Photonic crystals from emulsion templates, *Adv. Mater.*, 2001, **13**, 447–450.
- 2 (a) F. Shakeel, S. Shafiq, N. Haq, F. K. Alanazi and I. A. Alsarra, Nanoemulsions as potential vehicles for transdermal and dermal delivery of hydrophobic compounds: an overview, *Expert Opin. Drug Delivery*, 2012, **9**, 953–974; (b) D. K. Sarker, Engineering of nanoemulsions for drug delivery, *Curr. Drug Delivery*, 2005, **2**, 297–310.
- 3 M. M. Kaneda, S. Caruthers, G. M. Lanza and S. A. Wickline, Perfluorocarbon Nanoemulsions for quantitative molecular imaging and targeted therapeutics, *Ann. Biomed. Eng.*, 2009, **37**, 1922–1933.
- 4 T. G. Mason and J. Bibette, Shear rupturing of droplets in complex fluids, *Langmuir*, 1997, **13**, 4600–4613.
- 5 (a) J. M. Gordillo, Z. Cheng, A. M. Ganan-Calvo, M. Marquez and D. A. Weitz, A new device for the generation of microbubbles, *Phys. Fluids*, 2004, **16**, 2828–2834; (b) P. Garstecki, I. Gitlin, W. DiLuzio, G. M. Whitesides, E. Kumacheva and H. A. Stone, Formation of monodisperse bubbles in a microfluidic flow-focusing device, *Appl. Phys. Lett.*, 2004, **85**, 2649–2651.
- 6 (a) E. Castro-Hernandez, W. van Hoeve, D. Lohse and J. M. Gordillo, Microbubble generation in a co-flow device operated in a new regime, *Lab Chip*, 2011, **11**, 2023–2029; (b) I. Kobayashi, K. Uemura and M. Nakajima, Formulation of monodisperse emulsions using submicron-channel arrays, *Colloids Surf., A*, 2007, **296**, 285–289; (c) F. Malloggi, N. Pannacci, R. Attia, F. Monti, P. Mary, H. Willaime, P. Tabeling, B. Cabane and P. Poncet, Monodisperse colloids synthesized with nanofluidic technology, *Langmuir*, 2009, **26**, 2369–2373.
- 7 W.-C. Jeong, J.-M. Lim, J.-H. Choi, J.-H. Kim, Y.-J. Lee, S.-H. Kim, G. Lee, J.-D. Kim, G.-R. Yi and S.-M. Yang, Controlled generation of submicron emulsion droplets via highly stable tip-streaming mode in microfluidic devices, *Lab Chip*, 2012, **12**, 1446–1453.
- 8 J. I. Park, D. Jagadeesan, R. Williams, W. Oakden, S. Y. Chung, G. J. Stanisz and E. Kumacheva, Microbubbles Loaded with Nanoparticles: A Route to Multiple Imaging Modalities, *ACS Nano*, 2010, **4**, 6579–6586.
- 9 (a) A. Kabalnov, D. Klein, T. Pelura, E. Schutt and J. Weers, Dissolution of multicomponent microbubbles in the bloodstream: 1. Theory, *Ultrasound Med. Biol.*, 1998, **24**, 739–749; (b) P. S. Epstein and M. S. Plesset, On the Stability of Gas Bubbles in Liquid-Gas Solutions, *J. Chem. Phys.*, 1950, **18**, 1505–1509.
- 10 A. J. Webster and M. E. Cates, Stabilization of emulsions by trapped species, *Langmuir*, 1998, **14**, 2068–2077.
- 11 Y. Yip Cheung Sang, Vers des micromousses stimulables. *Phd Thesis*, Université Paris 7, 2009.
- 12 E. Lorenceau, Y. Yip Cheung Sang, R. Hohler and S. Cohen-Addad, A high rate flow-focusing foam generator, *Phys. Fluids*, 2006, **18**, 097103–5.
- 13 M. Stoffel, S. Wahl, E. Lorenceau, R. Hohler, B. Mercier and D. E. Angelescu, Bubble Production Mechanism in a Microfluidic Foam Generator, *Phys. Rev. Lett.*, 2012, **108**.
- 14 S. Sugiura, M. Nakajima, N. Kumazawa, S. Iwamoto and M. Seki, Characterization of spontaneous transformation-based droplet formation during microchannel emulsification, *J. Phys. Chem. B*, 2002, **106**, 9405–9409.
- 15 M. G. Freire, A. M. A. Dias, M. A. Z. Coelho, J. A. P. Coutinho and I. M. Marrucho, Aging mechanisms of perfluorocarbon emulsions using image analysis, *J. Colloid Interface Sci.*, 2005, **286**, 224–232.

- 16 A. M. Djerdjev and J. K. Beattie, Enhancement of Ostwald ripening by depletion flocculation, *Langmuir*, 2008, **24**, 7711–7717.
- 17 C. A. Fraker, J. Mendez, L. Inverardi, C. Ricordi and L. Stabler, Optimization of perfluoro nano-scale emulsions: The importance of particle size for enhanced oxygen transfer in biomedical applications, *Colloids Surf., B*, 2012, **98**, 26–35.
- 18 M. K. Kaneda, S. Caruthers, G. Lanza and A. Wickline, Perfluorocarbon nanoemulsions for quantitative molecular imaging and targeted therapeutics, *Ann. Biomed. Eng.*, 2009, **37**, 1922–1933.